


# GV-3D People Counter



## Introduction

The GV-3D People Counter integrates Asus Xtion Pro / Asus Xtion Pro Live to count and analyze the number of people passing by the designated detection area. You can connect the GV-3D People Counter with a VGA or HDMI monitor for direct display of counting data and configuring device settings through on-screen display (OSD) menu. GV-3D People Counter comes with a built-in Web interface, the GV-Web Report Lite, for easy setup and looking up people counting data.

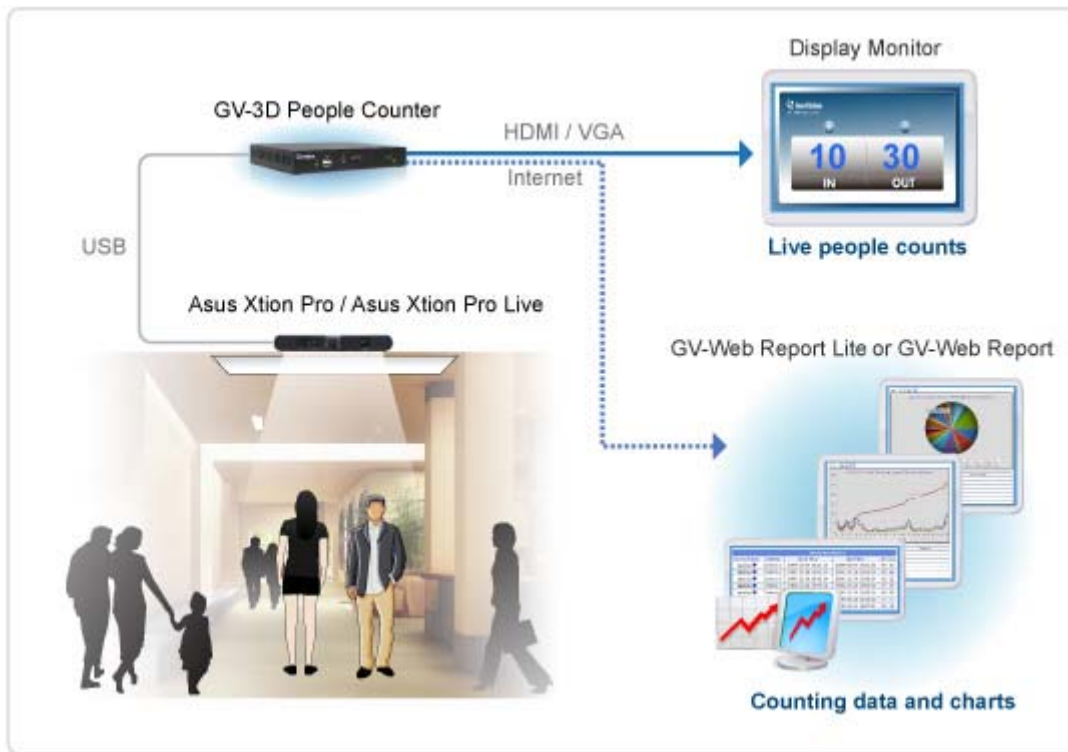

## Features

- Counts the number of people (In and Out)
- Support for HDMI and VGA compatible monitors
- IR remote control to configure on-screen display (OSD) menu
- GV-Web Report Lite: Web interface to look up people counting data and charts
- Support for data compiling and chart analysis on GV-Web Report
- Audio alarm for traffic in wrong direction and exceeding maximum entries, exits or stays
- Content Designer to customize layout on display monitor
- SDHC card supported

\* No SD/SDHC card slot & local storage function for Argentina.

## SPECIFICATIONS


Video Output	HDMI	480p, 720p, 1080i, 1080p
	VGA	640 x 480, 1024 x 768, 1280 x 768, 1366 x 768
Audio		3.5 mm Jack (for alarm)
IR Remote Control		Yes
Local Storage		SDHC card slot (4-32 G, Class 4 or above, FAT32 format)
Ethernet		10/100 Ethernet
Power Adapter		12V / 3A DC Jack (Max. 36 W)
Supported Browser		Mozilla Firefox, Google Chrome
Operating Temperature		0 °C ~ 40 °C (32 °F ~ 104 °F)
Operating Humidity		20 % ~ 80 % (with no condensation)
Dimensions (W x H x D)		182.3 x 28.9 x 131 mm (7.18 x 1.14 x 5.16 in)
Net Weight		615 g (1.36 lb)
Regulatory		CE, FCC compliant
Audio		3.5 mm Jack (for alarm)
IR Remote Control		Yes
Language	On-Screen Display	English
	Web Interface	English, Russian, Simplified Chinese, Traditional Chinese

## Compatible Firmware and Software Versions

	Asus Xtion Pro / Asus Xtion Pro Live	GV-Web Report
GV-3D People Counter V1.01	V5.3.26 and V5.7.9	V2.2.3.0
GV-3D People Counter V1.02	V5.7.9 and V5.8.22	V2.2.4.0 or later

**Note:** All specifications are subject to change without notice.

## Dimensions

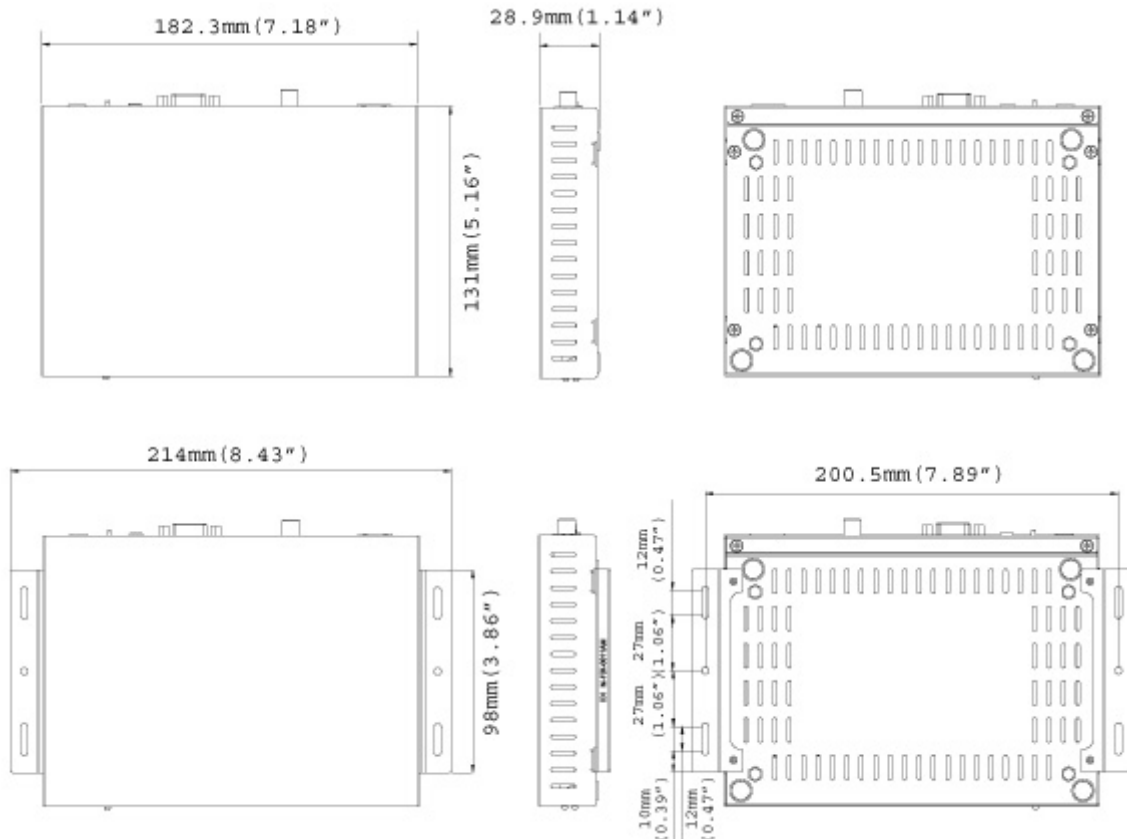

Overview






**Front View**



**Rear View**



**Options**

Name	Details
 Wall Mount Kit	The Wall Mount Kit is used to mount the GV-3D People Counter to the wall. <ul style="list-style-type: none"> <li>• L-type brackets x 2</li> <li>• Small screws x 4</li> </ul>
 VESA monitor mount kit	The VESA Monitor Mount Kit is used to mount the GV-3D People Counter to the back of a VESA monitor. <ul style="list-style-type: none"> <li>• VESA monitor mount bracket x 1</li> <li>• L-type brackets x 2</li> <li>• Large screws x 4</li> <li>• Small screws x 8</li> </ul>
 Asus Xtion Pro Live	The Asus Xtion Pro Live is a motion sensor used to detect the number of people who have walked through the detection area. The operating temperature is from 0°C ~ 40°C / 40°F ~ 104°F.
 Asus Xtion Pro/ Asus Xtion Pro Live In-Ceiling Mount	The In-Ceiling Mount is used to mount Asus Xtion Pro / Asus Xtion Pro Live on the ceiling. <ul style="list-style-type: none"> <li>• Cover for in-ceiling mount x 1</li> <li>• Magnet x 2</li> <li>• Support bracket x 2</li> <li>• Black long screw x 2</li> <li>• Screw nut x 2</li> </ul>
 USB Extension Cable	The 1.8 meters (5.9 feet) USB extension cable can extend the distance between the Asus Xtion Pro / Asus Xtion Pro Live and the GV-3D People Counter. <p>* You can connect multiple USB extension cables, but the total distance cannot exceed 5 meters (16.4 feet).</p>
<a href="#">GV-Web Report</a>	Through a Web browser, the GV-Web Report keeps track of and analyzes the people counting results from up to 1000 units of GV-3D People Counters. Compatible version: V2.2.3.0 or later

**Packing List**



**GV-3D People Counter**



**Software CD x 1**



**IR remote control x 1**

**Power cord x 1**



**AC/DC adaptor x 1  
(12 V, 3 A, 36 W)**

**SD Card x 1**