


DS-7208HVI-ST Standalone DVR



Key Features

- H.264 Video Compression
- Up to 4CIF Resolution Recording
- Dual Stream
- VGA or Video Output
- Up to 8-ch Synchronous Playback

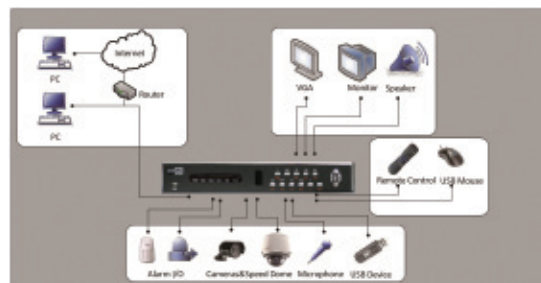

Specifications

		DS-7208HVI-ST
Video/Audio Input	Video Compression	H.264
	Video Input	8-ch, BNC (1.0 Vp-p, 75 Ω), PAL / NTSC adaptive
	Audio Compression	OggVorbis
	Audio Input	4-ch, RCA (2.0 Vp-p, 1 kΩ)
	Voice Talk Input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
Video/Audio Output	Preview Resolution	PAL: 704 x 576 NTSC: 704 x 480
	VGA Output	1-ch, Resolution: 1024 x 768 @ 60 Hz
	Recording resolution	4CIF / 2CIF / CIF / QCIF
	Video Output	2-ch, BNC (1.0 Vp-p, 75 Ω)
	Frame Rate	4CIF: 8 fps, 2CIF: 8 fps CIF / QCIF: 25 fps (P) / 30 fps (N)
	Video Bit Rate	32 Kbps - 2048 Kbps, or user defined
	Audio Output	1-ch, RCA (Linear, 600 Ω)
	Audio Bit Rate	64 Kbps
	Synchronous Playback	8-ch
	Hard Disk	Interface Type
	Capacity	Each supports up to 2TB capacity
External Interface	Network Interface	1, RJ45 10M / 100M adaptive Ethernet interface
	Serial Interface	1 RS-485 interface, 1 RS-232 interface
	USB Interface	2, USB 2.0
	Alarm Input	8-ch
General	Alarm Output	4-ch
	Power Supply	12 V DC
	Consumption	≤ 10 W (without hard disk or DVD-R/W)
	Working Temperature	-10 °C - +55 °C (14 °F - 131 °F)
	Working Humidity	10 % - 90 %
	Dimension (WxHxD)	445 x 45 x 290 mm (17.52" x 1.77" x 11.42")
Weight (without HDD)	≤ 4000 g (8.82 lbs)	