

SHANY

1.0 Megapixel IP Dome Camera SNC-212


- 1/4" 1.0 Megapixel Progressive CMOS Sensor
- 1280x720@30fps (720P) ; H.264, MPEG4, M-JPEG
- Color:0.2Lux@F1.2, B/W:0.05Lux@F1.2, Sense-UP:0.001Lux@F1.2
- Sense Up Function
- Motion Detection
- Built-in Microphone & Multicast Support
- Support 12Vdc / PoL (Option:PoE) Power Input
- Support ONVIF Profile S



Specifications

Video	Image Sensor	1 / 4" 1.0 Megapixel Progressive CMOS Sensor	
	Video Resolution/Frame Rate	1280x720@30fps, 720x480@30fps	
	Video Frame Rate	Up to 30fps for All Video	
	Video Compression	H.264, MPEG4, M-JPEG	
	Minimum Illumination	Color:0.2Lux@F1.2, B/W:0.05Lux@F1.2, Sense-UP:0.001Lux@F1.2	
	WDR/HDR	Yes/---	
	Second Video Output	1.0Vp-p Composite, 75Ω (BNC)	
	Signal to Noise Ratio	More than 50dB (AGC off)	
	Mechanical IR Cut Filter	---	
	IR LED ; Working Distance	---	
Function	Menu	Can Be Set Via Browser	
	Day&Night Mode	Auto / Manual (Color, B/W) / External / Schedule (Fixed)	
	Auto Electronic Shutter	1/7.5 to 1/100,000 sec.	
	Manual Electronic Shutter	1/7.5, 1/15, 1/25, 1/30, 1/50, 1/60, 1/100, 1/250, 1/500, 1/1,000, 1/10,000, 1/100,000 sec.	
	White Balance	Auto_wide / Auto_normal / Sunny / Shadow / Indoor / Lamp / FL1 / FL2	
	DNR ; Sense Up	--- ; Yes	
	Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / Hungarian / German / Persian / Spanish / Polish / Dutch	
	Image Setting	Brightness / Contrast / Saturation / Sharpness / Hue / EV Compensation / AWB / Rotation / Exposure Mode / Exposure Priority / Gain Control / Auto IRIS / BLC / ROI	
	Integrated Video Detection	Motion Detection	
	Timer Clock	Yes	
	Camera Control Interface	Pelco D, Pelco P, Customer	
	Network	Browser	IE 8.0 or Above
		Ethernet	10/100M Auto Negotiation
Bit Rate Transmission		64 up to 12,000 Kbps	
Supported Protocols		TCP IP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, RTSP, RTP, SNMP, TRAP, Ethernet (RJ-45 Wired 10/100/1000M Base-TX)	
Video Streaming		H.264, MPEG4 and M-JPEG Dual/Triple Streaming	
Audio Streaming		---	
Users		Support 9 Users	
Security		ID/Password Protection	
Alarm Trigger		File Upload via FTP and Email/Notification via Email, HTTP, External Digital Output Activation	
Multicast		Support Multicast Function	
General	Connector	RJ45/PoE, DC Power, BNC, Reset Button	
	Alarm IN/Alarm OUT	DI/DO	
	Automatic IRIS ; Connector	---	
	Lens Mount	Built-in Board Lens	
	Lens, Angle of View (H)	f4.0mm	
	Water Resistance	NA	
	Max. Breaking Strength	NA	
	Power Supply ; Consumption	12Vdc / PoL (Option:PoE) ; 4W	
	Operation ; Storage Temp.	-10°C ~ 50°C ; -20°C ~ 60°C	
	Operation ; Storage Humidity	Maximum: RH80% ; RH90%	
	Dimensions	127(DIA)x86.5(H)mm	
Net Weight	250g		
Accessories Option	---		

*Specifications are unfixed and do not apply to customized projects. 140422

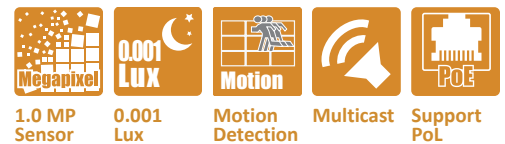

Dimensions

