


DS-6104HCI Digital Video Server



Key Features

- High performance DSP hardware compression
- H.264 video compression
- Dual streams
- Support variable bit rate and frame rate
- Multi-zone motion detection and private masking
- Multi-lever user access management

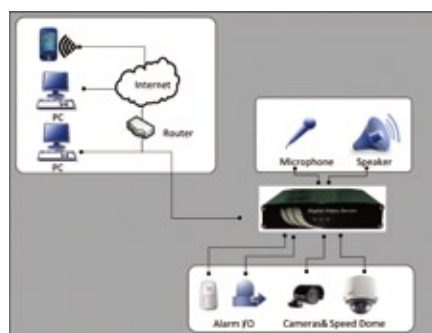

Specifications

		DS-6104HCI
Video/Audio input	Video compression	H.264
	Video input	4-ch
	Video input interface	BNC (1.0Vp-p, 75Ω), support PAL, NTSC
	Audio compression	OggVorbis, 16Kbps
	Audio input	4-ch
	Audio input interface	BNC(2Vp-p, 1kΩ)
Video/Audio output	Voice talk input	1-ch, RCA (2Vp-p, 1kΩ)
	Encode resolution	4CIF/DCIF/2CIF/CIF/QCIF
	Frame rate	4CIF/DCIF/2CIF: 4fps CIF/QCIF: 25fps(P) / 30fps(N)
	Stream type	Video/Video&Audio
	Support dual stream	Yes
	Video bit rate	32Kbps~2Mbps, or user-defined (Max. 8Mbps)
External interface	Audio output	1 channel RCA (linear electrical level, 600Ω)
	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface, 1 RS232 interface and 1 RS485 interface
	Alarm input	4-ch
General	Alarm output	2-ch
	Power supply	12VDC
	Consumption	≤20W
	Working temperature	-10°C~+55°C(14°F~131°F)
	Working humidity	10%~90%
	Dimension	123(D)x39(H)x198mm(W)(4.85"(D)x1.54"(H)x7.80"(W))
Weight(without HDD)	≤1500g(3.31lbs)	