


INT-RS

RS-232 INTERFACE FOR SYSTEMS INTEGRATION

- RS-232 interface installed on keypad bus
- **GUARDX** communication
- RS-232 based monitoring support
- open protocol for systems integration

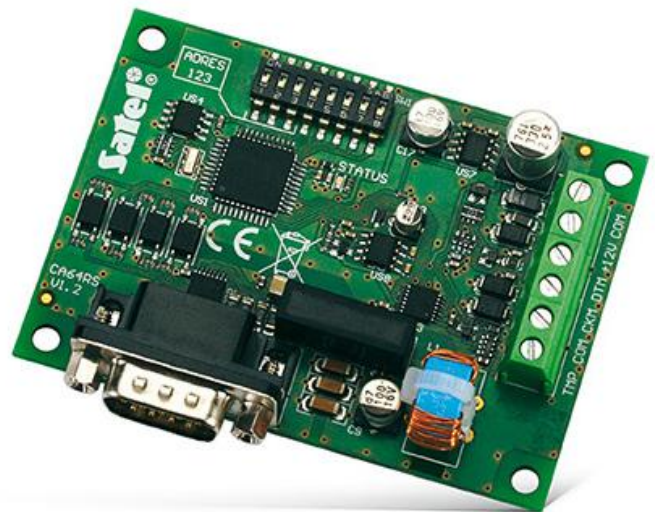

TECHNICAL DATA

Environmental class	II
Supply voltage	12 V DC
Board dimensions	57 x 80 mm
Operating temperature range	-10...+55 °C
Standby mode current consumption	35 mA
Max. current consumption	35 mA
Weight	39 g



The actual appearance of the products may differ from the presented images. Product descriptions are provided in the web service for information purposes only.