

DTMRX2

TELEMETRY DATA RECEIVER, 12 FUNCTIONS

MAIN FEATURES

11 standard functions for the control of P&T motors and zoom lenses, 1 function for the control of one auxiliary service (dry contact)

RS232, RS485 selectable communication

Aux can be used for wiper operation

Compatible with protocol PELCO D

Version 24Vac (DTMRX224)

RS232, RS485 repeater for daisy chain configuration

Operating temperature: -20°C / +50°C (-4°F / 122°F)

DESCRIPTION

The DTMRX2 is a digital receiver, controlled by a microprocessor, for remote control of a Pan & Tilt motor and a motor-driven zoom lens.

The DCJ, DCTEL and SM matrix series control units ensure complete control of all the DTMRX2 functions. It is also interfaced to a PC through RS232. Connection to the control unit can be RS232 or RS485.

An IP56 weatherproof box ensures protection against all weather conditions.

It is available in 24Vac or 230Vac versions for Pan & Tilt motors, and allows feeding common ground or polarity inversion zoom lenses.

A relay auxiliary function is available for controlling, for instance, the switching on of an IR illuminator through a power contact or the control of the wiper.

Four PG11 cable glands make connections easier.



DTMRX2

TECHNICAL DATA**GENERAL**

12 Functions: UP, DOWN, LEFT, RIGHT, AUTO, ZOOM TELE, ZOOM WIDE, FOCUS NEAR, FOCUS FAR, IRIS OPEN, IRIS CLOSE, AUX

99 identification addresses, selectable by dip switches

RS232, RS485 selectable communication

Repeater RS232 or RS485 for daisy chain configuration

Ability of using both polarity inversion lenses and common wire lenses

EEPROM for storing activated functions

LED indicating power supplied to the unit

LED indicating command reception

LED indicating data reception

Supplied with instruction manual, 2 PG11 blanking caps, 4 wall mounts with relevant fastening screws

MECHANICAL

Plastic material enclosure

4 PG11 cable glands

Dimensions: 225x154x81mm (9x6x3in)

Unit weight: 1kg (2.2lb)

ELECTRICAL**DTMRX2**

Power supply: 230Vac, 50/60Hz

Consumption: 10W

Max. switching power 100W

Power supplied to the positioning device: 230Vac, 50/60Hz

Power supplied to the lens: from 3Vdc to 14Vdc, 100 mA max

AUX: auxiliary dry contact 1A 230Vac or 1A 24Vac

Protection fuse: F1: F 250mA L 250V

DTMRX224

Supply voltage: 24Vac, 50/60Hz

Consumption: 10W

Max. switching power 100W

Power supplied to the positioning device: 24Vac, 50/60Hz

Power supplied to the lens: from 3Vdc to 14Vdc, 100 mA max

AUX: auxiliary dry contact 1A 24V or 1A 230Vac

Protection fuse: F1: F 2.5A L 250V

PROTOCOLS

PELCO D (2400 baud)

VIDEOTECH (1200, 9600, 19200, 38400 baud)

VIDEOTECH MACRO (1200, 9600, 19200, 38400 baud)

PELCO is registered trademark.

The product may be interfaced with devices not manufactured by VIDEOTECH. It is possible that the interface protocols have changed or are in a different configuration from earlier tested units by VIDEOTECH. VIDEOTECH recommends a test prior to installation. VIDEOTECH will not be liable for any installation costs or lost revenues in the event a compatibility problem will occur.

COMMUNICATIONS

Selectable communication speed

Repeater RS232 or RS485 for daisy chain configuration

Telemetry data input RS485 on Matrix Series SM serial output for a max distance of 1200m (3937ft)

Telemetry data input RS485 on keyboard serial output, max distance of 1200m (3937ft)

Telemetry data input RS232 for PC or keyboard control for a max distance of 15m (49ft)

ENVIRONMENT

Indoor / Outdoor

Operating temperature: -20°C / +50°C (-4°F / 122°F)

CERTIFICATIONS

Electrical safety (CE): EN60065

Electromagnetic compatibility (CE): EN50130-4, EN55022 (Class B), FCC Part 15 (Class B)

IP protection degree: EN60529 (IP56)

EAC certification

RELATED PRODUCTS

SM82A Video matrix 8 inputs and 2 outputs

SM164B Video matrix 16 inputs and 4 outputs

SM328B Matrix 32 inputs and 8 outputs

DCTEL Matrix and telemetry control keyboard

DCJ Keyboard for video and telemetry control

PTH310 Pan&Tilt, 230Vac

PTH311 Pan&Tilt, 24Vac

NXPHT210 Stainless steel Pan&Tilt, 230Vac

NXPHT211 Stainless steel Pan&Tilt, 24Vac


Retrofit on discontinued products: contact VIDEOTECH for further specifications.

PACKAGE

Model Number	Weight	Dimensions (WxHxL)	Master carton
DTMRX2	1.2kg (2.6lb)	9.5x18x29cm (4x7x11in)	20

TECHNICAL DRAWINGS

Sizes in millimeters.

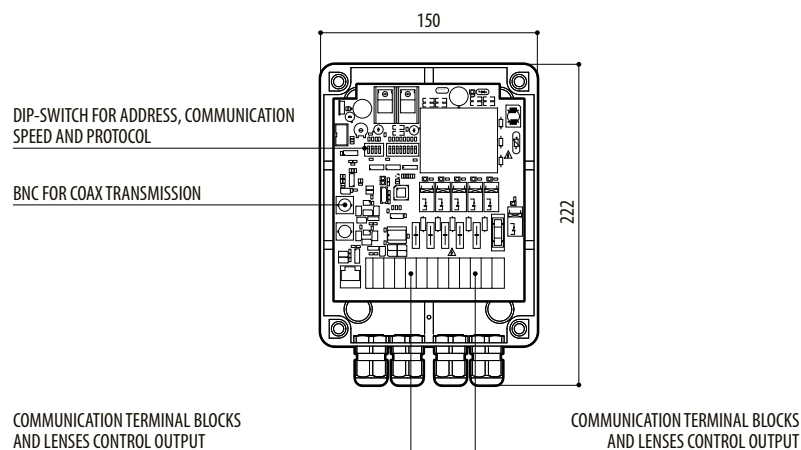

DTMRX2